


PASSIVE SUBWOOFER

Dear Customer, Congratulations on the purchase of your loudspeaker(s). Please read these instructions carefully and keep them for future reference.



SAFETY PRECAUTIONS

- Before connecting the equipment to the power outlet, first verify that the mains voltage and frequency match the values specified on the equipment.
- If the power cord of the device is equipped with an earthing contact, then it must be connected to an outlet with a protective ground. Never deactivate the protective ground of a power cord.
- Unplug the power cord and power adapter from the power outlet if there is a risk of a lightning strike or before extended periods of disuse.
- Replace fuses only with fuses of the same type and rating. If a fuse blows repeatedly, please contact an authorized service company.
- Do not open or modify this equipment.
- After connecting the equipment, check all cables in order to prevent damage or accidents, e.g., due to tripping hazards.
- Do not turn on the Amplifier ON before checking that all volumes to zero.

▲ IMPORTANT

Never remove the cover, because otherwise there may be a risk of electric shock. There are no user serviceable parts inside. Have repairs carried out only by qualified service personnel.

⚠ The lightning flash with arrowhead symbol within an equilateral triangle is intended to alert the user to the presence of uninsulated "dangerous voltage" within the product's enclosure that may be of sufficient magnitude to constitute a risk of electrical shock.


⚠ The exclamation mark within an equilateral triangle is intended to alert the user to the presence of important operating and maintenance instructions.

CAUTION
RISK OF ELECTRIC SHOCK. DO NOT OPEN.

The amplifier is marked with this instruction so please proceed accordingly in order to avoid any hazard.

Connections and Controls

Please refer to the following scheme and instructions:

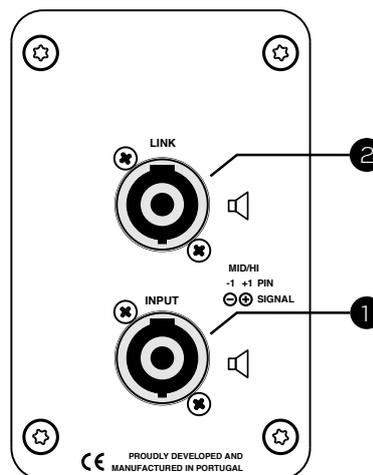

1. **INPUT:** Speakon NL4 compatible input (+1/-1).
2. **LINK:** Speakon NL4 compatible output (parallel wired with Speakon compatible input (1+/-1)).

Technical specifications

- range : <400 m²
- system : Bass reflex, passive
- woofer : 15" EU-transducer
- impedance : 8 Ω
- bass reflex
- amp power (RMS/peak) : 1000 / 1400 W
- sensibility : 136 dB
- frequency range : 38 Hz - 160 Hz
- connection : Speakon 2 x NL4 in parallel
- dimensions (h x w x d) : 430 x 530 x 550
- weight / piece : 9.9kg
- composition : 15 mm multiplex box with polyurethane coating
- colour : black

Warranty conditions

2 year warranty from the date of manufacture. The warranty is limited to the repair or replacement of the defective material insofar as this defect is a result of normal use and the device has not been damaged. Artsound is not responsible for any other casts that ensue as a result of the defect (e.g. transport). For details, please consult our general terms and conditions of sale.



Waste electrical products should not be disposed of with household waste. All electronic products with the WEEE logo must be collected and sent to approved operators for safe disposal or recycling. Please recycle where facilities exist. Many electrical/electronic equipment retailers facilitate "Distributor Take-Back scheme" of household WEEE. Check with your Local Authority or retailers for Designated Collection Facilities (DCF) where consumers may dispose of their WEEE free of charge."