Standard Commercial Displays - SE3KD Series Easily Managed Digital Signage Today's brewed Coffee

Simplify and easily manage your promotional content with the SE3KD Series, designed for a wide range of business purposes. The SE3KD Series has a practical design, with a slim bezel and low depth that helps with easy installations and efficient space utilization. The wide variety of screen sizes offers a model that will fit in virtually any business environment.



Built-in Speaker Model (10 W x 10 W)

Key Features

Sleek Design



Slimmer Bezel

The slim bezel allows a perfect fit for a sleek look.



Detachable Logo

Portrait mode allows the logo to be positioned in the desired setting.



Cable Management

The well-organized cable terminals in the back optimize available space.



USB Content Management



USB Content Scheduling

Play and schedule your content via a USB connection, with no Internet or server connection required*.



* Supported Content Type : Video (MPEG1/2/4, H.264), Audio (MP3, AC3, MPEG, AAC, HEAAC, LPCM), Image (JPEG, PNG, BMP)

Dust & Humidity Protection



Conformal Coating

Circuit board reliability is enhanced with conformal coating that protects against dust, iron powder, humidity and other harsh conditions.





Standard Commercial Displays - SE3KD Series

Easily Managed Digital Signage



Screen Sizes

65", 55", 49", 43", 32"



SE3KD Series


- Edge-lit LED
- Brightness: 350 cd/m² (65": 400 cd/m²)
- Bezel: T/L/R-11.9 mm (32": 13.0 mm), B-18.0 mm
- Depth: 38.6 mm (65": 41.1 mm, 32": 55.5 mm)
- HDMI (2), DVI, RJ45, IR Receiver, RS232C in/out, USB
- Built-in Speaker: 10 W x 10 W

Other Features

Convenient Management


Enhanced Connectivity

Through its diverse interface, the signage lets you connect more than one device for optimal use.

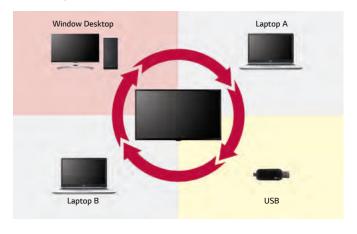

Wi-Fi Support

SE3KD Series supports Wi-Fi USB dongle connection for convenient content distribution. And SNMP support ensures convenient network management.



* SNMP: Simple Network Management Protocol

Convenient Screen Mode

Aspect Ratio Sustainability*

Sustain the same resolution and picture quality while powering on/off by receiving EDID¹⁾ through switch IC.



- 1) Extended Display Identification Data.
- * Installation Menu > LG Digital Signage > PM Mode

Stand-by Screen*

Even without signal from the media player, the network does not turn off completely, so remote control is possible, which prevents unnecessary power usage and enables efficient management.



Scheduled Screen Wash**

Prevent residual images with the screen transition feature.





** Installation Menu > ISM Method

Dimension

65"


57.4" x 33" x 2.2" / 61.5 lbs






55"


48.7" x 28.1" x 2.1" / 38.6 lbs






49"


43.4" x 25.1" x 2.1" / 31.5 lbs






43"

38.2" x 22.2" x 2.1" / 22 lbs







32"

28.7" x 16.9" x 2.2" /

11.9 lbs






Specifications

SE3KD Series		65SE3KD	55SE3KD	49SE3KD	43SE3KD	32SE3KD
	Screen Size	65"	55"	49"	43"	32"
	Panel Technology			IPS (PD)		
	Aspect Ratio	16:9				
	Native Resolution	1,920 x 1,080 (FHD)				
PANEL	Brightness	400 cd/m ² 350 cd/m ²				
	Contrast Ratio	1,300:1 1,100:1				
	Dynamic CR	500,000:1				
	Viewing Angle (H x V)	178 x 178				
	Response Time	10 ms (G to G BW), 7.6 ms (WOT)	12 ms (G to G BW), 9 ms (WOT)	12 ms (G to G BW), 10.1 ms (WOT)	12 ms (G to G BW), 9.4 ms (WOT)	10 ms (G to G BW), 7.1 ms (WOT)
	Conferent Toronton and	7.0 11.5 (1701)	` ′	` ′	` ′	7.1 1115 (1101)
	Surface Treatment	Hard coating (3H), Anti-glare treatment of the front polarizer (Haze 1 % (Typ.))				
	Guaranteed Operating Hour	18 Hours				
	Orientation	Landscape & Portrait				
PHYSICAL SPECIFICATION	Input	HDMI (2), DVI, RGB, Audio, USB				
	Output	Audio				
	External Control	RS232C (In/Out), RJ45, IR Receiver				
	Bezel Color	Black				
	Bezel Width	11.9 mm (T/R/L), 18 mm (B)			13 mm (T/R/L), 18 mm (E	
	Monitor Dimensions (W x H x D)	57.4" x 33" x 2.2"	48.7" x 28.1" x 1.2"	43.4" x 25.1" x 2.1"	38.2" x 22.2" x 2.1"	28.7" x 16.9" x 2.2"
	Weight (Head)	61.5 lbs	38.6 lbs	31.5 lbs	22 lbs	11.9 lbs
	Weight (Head + Stand)	73 lbs	45.9 lbs	38.8 lbs	27.6 lbs	13.7 lbs
	Monitor with Optional Stand Dimensions (W x H x D)	57.4" x 35.4" x 11.6"	48.7" x 30.4" x 8.6"	43.4" x 27.4" x 8.6"	38.2" x 24.5" x 7.6"	28.7" x 18.9" x 6.1"
	Carton Dimensions (W x H x D)	61.5" x 38.5" x 7.5"	52.4" x 31.8" x 6.7"	47.1" x 29.9" x 6.5"	41.4" x 25.6" x 4.8"	31.9" x 20.1" x 5.2"
	Packed Weight	74.5 lbs	47.8 lbs	38.4 lbs	26.9 lbs	14.8 lbs
	VESA [™] Standard Mount Interface		300 mm x 300 mm		200 mn	n x 200 mm
SPECIAL FEATURES	USB Content Scheduling, Conformal Coating, SNMP Support, Wi-Fi Ready (Dondle), Power Management Modes (Sustain Aspect Ratio / Stand-by Screen, etc.), No Signal Image setting, Enhanced ISM (Image Sticking Minimization) Mode, Holiday Schedule / Local Time Auto Setting, Fail-over (USB, RGB, DVI, HDMI), Wake on LAN					,
ENVIRONMENTAL CONDITIONS	Operating Temperature Range	32° F to 104° F				
	Operating Humidity Range	10 % to 80 %				
	Power Supply	100-240V~, 50/60Hz				
POWER	Power Type			Built-In Power		
POWER CONSUMPTION	Тур.	95 W	70 W	65 W	60 W	50 W
	Smart Energy Saving	70 W	55 W	50 W	45 W	35 W
AUDIO POWER	Smart Energy Saving	70 00				33 **
AODIO FOWER	Safety	20 W (10 W x 2) for Internal Speaker (6 ohm) UL / cUL / CB / TUV / KC				
STANDARD (CERTIFICATION)	EMC	FCC Class "A" / CE / KCC				
MEDIA PLAYER	ErP / Energy Star External Media Player Attachable	NA / Yes (Energy Star 7.0) Yes (MP500 / MP700) No				
COMPATIBILITY	C	CoperCity M				
SOFTWARE	Content Management Software	SuperSign W				
COMPATIBILITY	Control and Monitoring Software	SuperSign C				
	Basic	Remote Controller (2 batteries included), Power Cord, QSG, RGB Cable, Regulation Book, Phone to RS232C Gender				
ACCESSORIES	Optional	Stand (ST-652T), Media Player	Stand (ST-492T), Media Player	Stand (ST-492T), Media Playe	Stand (ST-432T), Media Player	Stand (ST-322T)


Connectivity

- 1 RS-232C IN
- 2 RS-232C OUT3 AUDIO IN
- 4 AUDIO OUT
- **3** EXTIRIN
- 6 HDMI in 1
- HDMI in 2DVI-D IN
- 9 LAN
- RGB IN
- **1** USB





55SE3KD / 49SE3KD / 43SE3KD / 32SE3KD









HDMI

Learn more www.lg.com/b2b



LG may make changes to specifications and product descriptions without notice. Copyright © 2017 LG Electronics Inc. All rights reserved. "LG Life's Good" is a registered trademark of LG Corp. The names of products and brands mentioned here may be the trademarks of their respective owners. $SPEC_SE3KD_071734_PR$

